

# ACD47 LG Container Dolly

Base, Line Maintenance &  
Ground Handling Equipment



## Ground Handling Equipment

Reliable easy to use low maintenance equipment  
for efficient ramp operations.



## Key features

- 6800kg Capacity
- ULD capacities; LD 1x2, LD 2x2, LD3x2, 1x LD4, LD5, LD6 & LD8.
- Tow-bar is fitted with a grip handle and 50mm towing eye with a 30mm ring.
- Inverted castor deck.
- Lift up stops with spring loaded vertical wind catcher restraints.

## ACD47 LG Container Dolly

The ACD47LG features a load bed with inverted air cargo castors, lead-on rollers and lift up stops at each side. The container end stops with vertical restraint mechanisms are remotely operated from either side of the dolly.

The running gear consists of 4 15 x 4.8 x 300D 3-stage super elastic solid rubber tyres on two-piece x5mm wheel rims and our unique flange-mounted 5 stud taper roller bearing hub system with separately detachable axle-ends. The unit also features turntable steering mounted on a heavy duty, zinc plated ball bearing ring.

The dolly also features highly effective parking brakes which are operated from the front wheels and are activated when the tow-bar is automatically latched in the raised position. A foot pedal releases the latch and the brakes are released when the tow-bar is lowered to towing height.


The tow-bar itself is fitted with a grip handle. The steel tow-eye has a diameter of 50mm and a ring section diameter of 30mm. The tow-bar has been designed to ensure no contact with the ground when allowed to fall. An 'E' type rear hitch with a captive spring loaded pin is also fitted.

# ACD47 LG Container Dolly

Product code:  
3100-100-00-00

## Options & extras

- Additional stops and guides.
- Alternative coupling types.
- Special corporate markings and liveries.
- Additional visibility markings.
- Additional hitches and tow eyes.
- Side and top corner buffers.

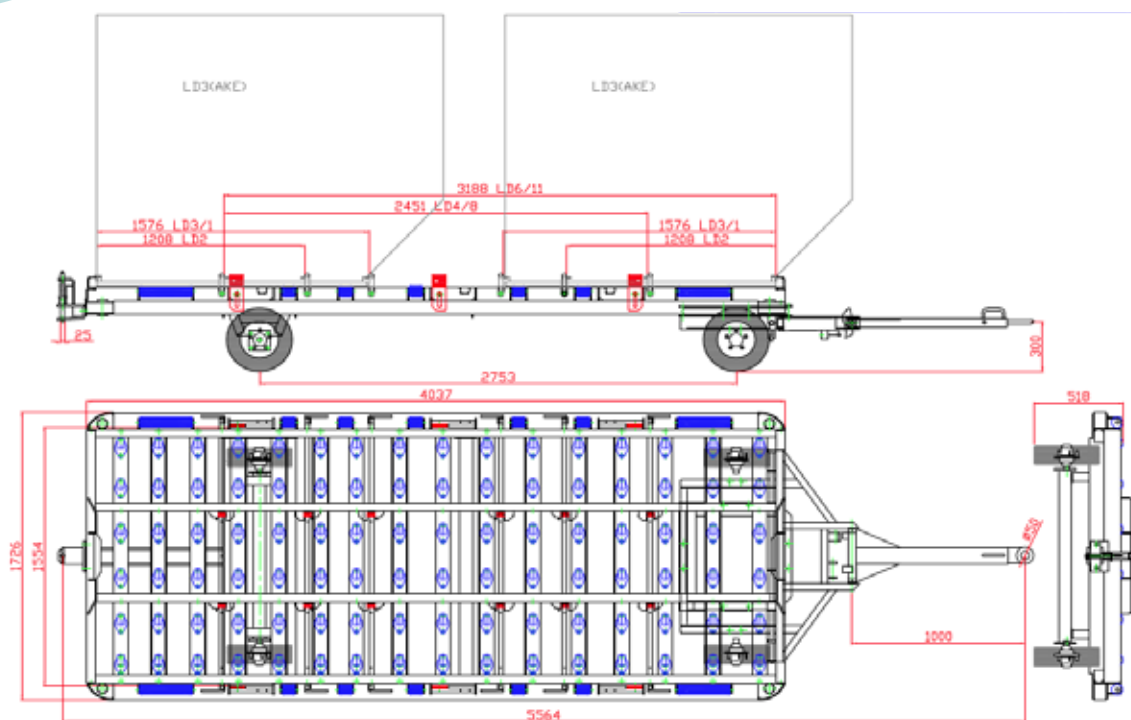

Please note that every effort is made to ensure that all dimensions are correct, however we do reserve the rights to make changes at our own discretion.



Waterton House,  
Waterton Industrial Estate  
Bridgend, South Wales, CF31 3US  
United Kingdom



Tel +44 (0) 1656 652 202  
Email [info@tbduk.co.uk](mailto:info@tbduk.co.uk)  
[www.tbduk.co.uk](http://www.tbduk.co.uk)