

ACD73 Container Dolly

Base, Line Maintenance &
Ground Handling Equipment



Ground Handling Equipment

Reliable easy to use low maintenance equipment
for efficient ramp operations.

Key features

- 6800kg Capacity.
- Narrow side towed pallet dolly for 2x LD3 containers, 125x96, 125x88 and pallet.
- Inverted castor deck.
- Lift up stops with spring loaded vertical wind catcher restraints.



ACD73 Container Dolly

Built to a custom specification, the ACD73 Dolly has a capacity of 6800kgs and features a load bed with high quality inverted castors, lead on rollers at both sides and the rear end. Heavy duty lift up stops are fitted to retain multiple ULD types and sizes.

The running gear comprises of two twin wheeled swivelling castors at the front with 50mm diameter king-pin and offset hub with heavy duty taper-roller bearings. Two twin wheeled fixed units feature at the rear. Wheels are two piece de-mountable pressed steel rims, fitted with 16" x 5" x 8 x 3.75F super elastic three stage solid rubber tyres. The wheels are mounted on four double ended axles with 5 stud taper roller bearing hubs. All axles are centrally pivoted 'rocking-axles' providing smooth running.

The unit is controlled via the two front swivelling castors. The ACD73 Dolly also exhibits high quality brakes on all four rear wheels that are engaged by raising the tow bar to an automatically latched position and released via a foot pedal mounted in the tow bar.

The towbar is fitted with a 75mm steel tow eye and a downward spring balancer is fitted to prevent ground impact.


The rear hitch is a heavy duty 'E' type with a captive spring-loaded 33mm diameter pin that can be retained in the open position.

ACD73 Container Dolly

Product code:
3200-150-00-00

Options & extras

- Additional stops and guides.
- Alternative coupling types.
- Special corporate markings and liveries.
- Additional visibility markings.
- Additional hitches and tow eyes.
- Side and top corner buffers.

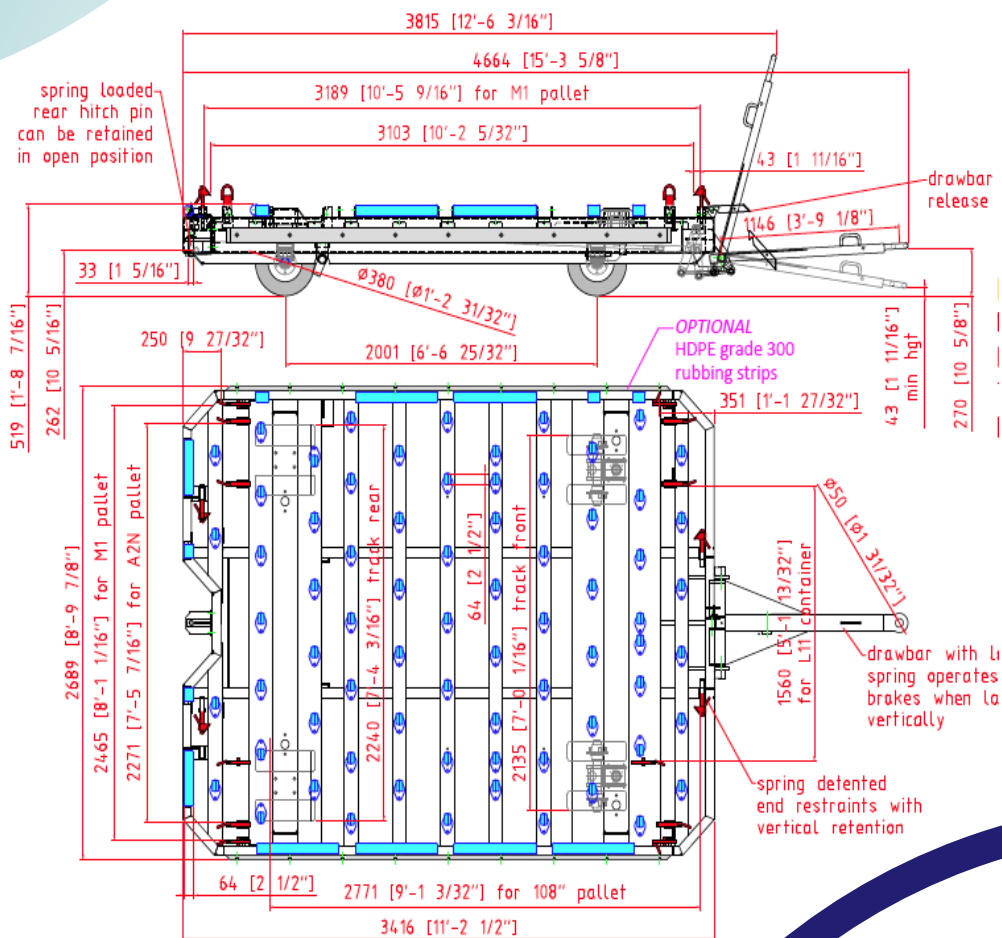

Waterton House,
Waterton Industrial Estate
Bridgend, South Wales, CF31 3US
United Kingdom



Tel +44 (0) 1656 652 202
Email info@tbduk.co.uk
www.tbduk.co.uk

Please note that every effort is made to ensure that all dimensions are correct, however we do reserve the rights to make changes at our own discretion.