

# ACD140R Trailer




Base, Line Maintenance &  
Ground Handling Equipment



## Ground Handling Equipment

Reliable easy to use low maintenance equipment  
for efficient ramp operations.

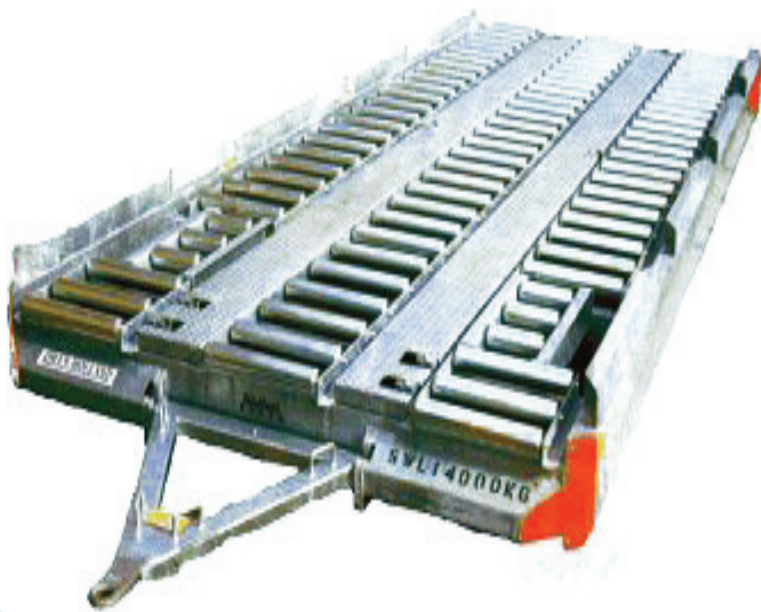

## Key features

- A heavy duty pallet double length dolly, capable of handling 1 x 238.5 x 96 9 (20ft).
- 14,000kg capacity.
- Load bed comprises 3 rows of heavy duty 75mm rollers with 2 grip face walkways.
- Manual lift up stops to suit designated containers.
- Continuous guides on each side of the unit for ease of loading.
- 75mm Tow-Bar eye.



## ACD140R Trailer

Part of a range of robust, reliable, high capacity ramp container and pallet dollies. Compliant to IATA and European CE Standards and specifically designed for arduous service over many years on busy airport ramps.

The ACD140R's 14,000kg carrying capacity is supported by a load bed which consists of 3 rows of heavy duty 75mm rollers, separated by two grip faced steel walkways. Continuous guides on each side and across the front of the unit allow for rolls to be loaded on or off the rear of the bed.

The running gear consists of four twin wheeled rocking axle swivel castors which are fitted to the front of the unit. Each of the wheels are attached to 5 stud wheel hubs. Wheels have a 15" diameter x 4.5" wide. Rear wheels are on 4 fixed castor mountings with rocking axles. Super elastic 3-stage rubber tyres are fitted to each of the 16 wheels as standard.

The parking brakes are operated on the periphery of the rear wheels and are on the pram brake type, operating on all 8 rear wheels. Brakes are actuated by the tow-bar being latched in the vertical position. The tow-bar has a 75mm diameter steel eye, a grip handle is provided on top of the tow-bar which is spring damped to remain at towing height level.


Hi-visibility markings are displayed on surround-frame corners and both sides of tow-bar is standard.

# ACD140R Trailer

Product code:  
3200-010-00-00

## Options & extras

- Additional stops and guides.
- Side and top corner buffers.
- Special paint finish and corporate markings.
- Additional hi-vis markings.
- Four track steering.
- Alternative hitches-locking E-hitch, rockinger, self latching etc.
- Alternative tow eyes.
- Alternative ULD Configurations and load capacities.

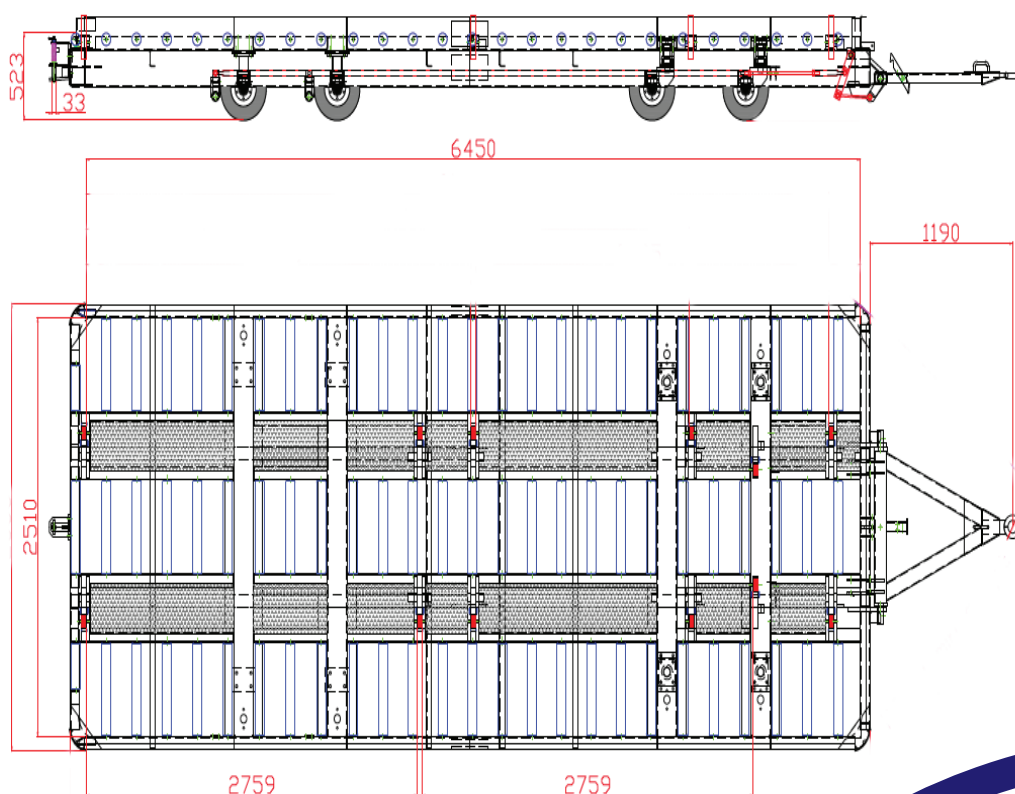

Please note that every effort is made to ensure that all dimensions are correct, however we do reserve the rights to make changes at our own discretion.



Waterton House,  
Waterton Industrial Estate  
Bridgend, South Wales, CF31 3US  
United Kingdom



Tel +44 (0) 1656 652 202  
Email [info@tbduk.co.uk](mailto:info@tbduk.co.uk)  
[www.tbduk.co.uk](http://www.tbduk.co.uk)